

REVISION RECORD			
REV	ECD	DESCRIPTION	DRFT

NOTES:

MATERIAL:

- 1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.30mm.
- 3. PLATING : SELECTING GOLD PLATING 3u"~50u" OVI NICKEL

ELECTRICAL:

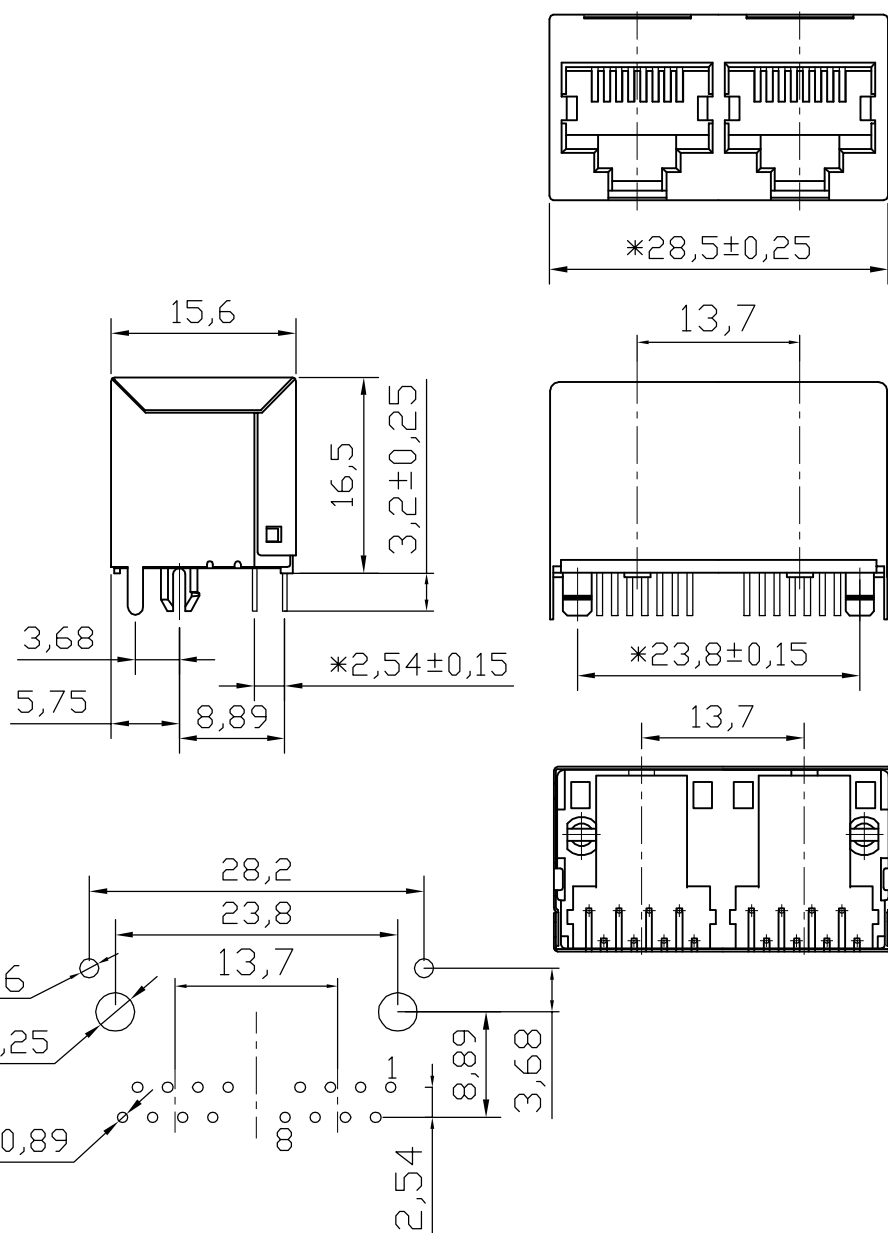
- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5. DIELECTRIC WITHSTANDING RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL:



- 1. DURRABILITY : 750 CYCLES MIN.
- 2. PCB RETENTION PRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40° C TO 85° C.
- 2. OPERATION : 0° C TO 70° C.



PC Board Layout
Component Side Shown

← MM (INCH) → TOLERANCES EXCEPT AS NOTED		DFTO: SHB DATE: 2007.05.05 CHKD: LANBO DATE: 2007.05.05 MFO: DATE: APPVL: DATE:	 TITLE 5224TOP ENRY JACK 2 PORT
MM .0 ± 0.15 ± .00 ± 0.075 ± .000 ± 0.05 ±	ANGLES ± 0.5  THIRD ANGLE PROJECTION	MATERIAL : QTY : FINISH : SCALE :	
SHEET OF			SIZE A3