
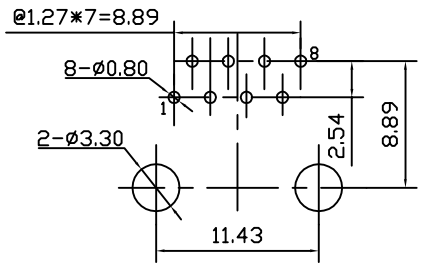
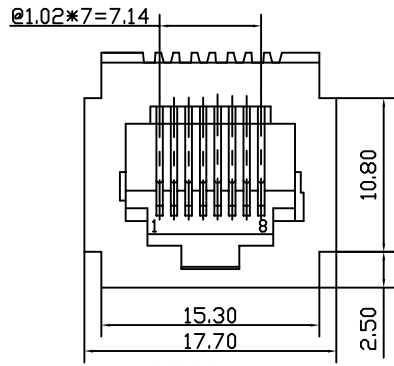


耳朵互换

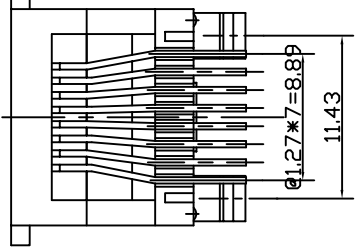

电气特性:

1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMPS@25° C
3. 接触电阻: 20mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度: 1000 VAC RMS, contact to contact 或 1500VDC, contact to screen and test panel @0.5mA 50Hz 或 60Hz 1 分钟.

机构特性:

1. 塑壳材质: PBT, UL94V-0;
2. 圆针材质: 磷青铜, Ø0.46mm;
3. 圆针电镀: 镍底, 表面全部镀金;
4. 插入/拔出力: 30N Max.
5. 配合强度: 50N for 60s±5s.
6. 使用寿命: 最少750次插拔.

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
 2. OPERATION TEMPERATURE : -40°C~+85°C
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
ROHS PART NUMBER:

环境特性:

1. 储存温度: -40°C~+85°C相对湿度<80%.
2. 工作温度: -40°C~+85°C

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMPS@25° C
3. CONTACT RESISTANCE : 20 MΩ MIN @500VDC.
4. INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
5. WITHSTAND VOLTAGE : 1000 VAC RMS, contact to contact or 1500VDC, contact to screen and test panel @0.5mA 50Hz or 60Hz 1 min.

MECHANICAL:

1. HOUSING MATERIAL : PBT UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. CONTACT PLATING : GOLD PLATING OVER NICKEL.
4. MATING/UNMATING FORCE: : 30N Max..
5. RETENTION STRENGTH : 50N for 60s±5s.
6. DURABILITY : 750 CYCLES MIN

RoHS Compliant

Coorle 库乐科技

TOLERANCES
公差
00~15 ± 0.15
15~30 ± 0.20
30~ ± 0.25
ANGLES ±1°

Material:
材质

Finish:
电镀

SHEET 1 OF 1
第 1 页 共 1 页

Designed:
设计 陈智艳

Checked:
审核

Approved:
核准

NAME:
名称

DWG NO:
图号

PART NO:
料号

RJ45 5222 8P-A WITH EAR WITH GRID SPLIT PEG

REV.
版本

16



A4
SIZE

SCALE
比例 1:1

UNIT
单位 mm

CUSTOMER:
客户 MODEL NO:
料号