




| REV. | ECN. NO. | NAME  | DATA       |
|------|----------|-------|------------|
| AO   | NEW      | MIN-D | 2012-8-19  |
| A1   | 更改剥头长度   | MIN-D | 2013-08-01 |

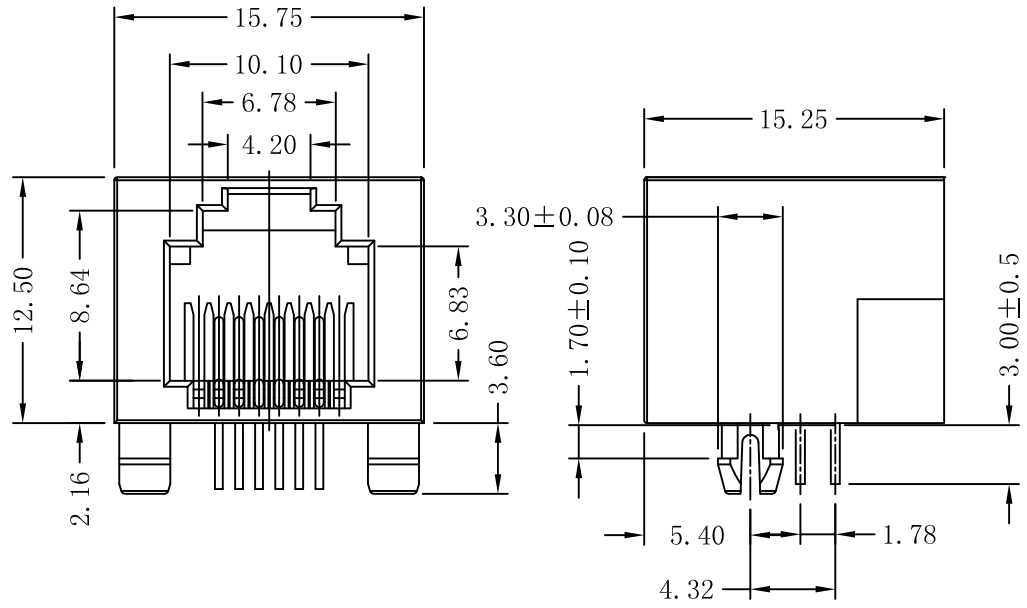


ELECTRICAL:  
 CURRENT RATING: 1.5AMPS  
 VOLTAGE RATING:125VAC  
 INSULATION RESISTANCE:100MEG OHMS MINI WITHSTAND  
 VOLTAGE:AC  
 1000V RMS 50Hz or 60Hz 1min  
 CONTACT RESISTANCE:20MILLIMHOS MAX

MECHANICAL:  
 LEAD RETENTION STRENGTH:7.7Kg BETWEEN JACK  
 AND PLUG  
 CRIMP TENSILE STRENGTH:2.27Kg DURABILITY:750MATING  
 CYCLES MINI

MATERIAL  
 HOUSING:STANDRD PA66 UL94-V0 BLACK  
 CONTACT WIRE:0.46mm DIAMETER PHOSPHOR BRONZE OPTIONAL  
 GOLD  
 PLATING OVER NICKEL  
 GOLD PLATING:+3u INCH,

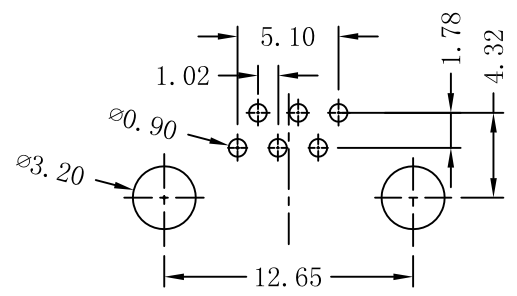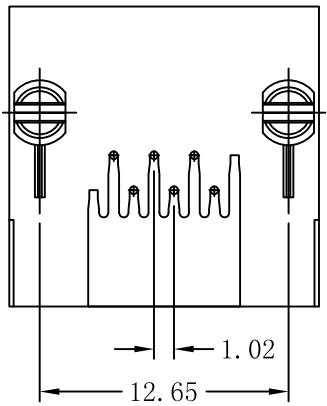

PC Board Layout

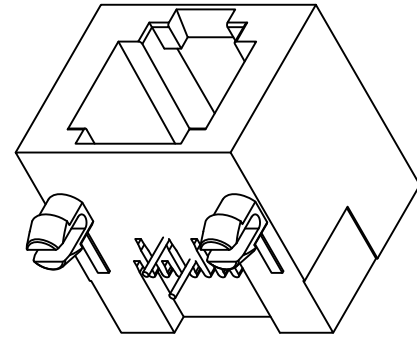

|                    |                |                    |
|--------------------|----------------|--------------------|
| DETACHED LISTS     | MM (INCH)      | 绘图: 周卫柏 2013-08-01 |
|                    | 公差: TOLERANCES | (Designed)         |
|                    | MM             | 审核:                |
|                    | MM             | (Checked)          |
| MM                 | 批准:            | (Approved)         |
| 角度 (ANGLES) ± 1.5° | 材料: SEE NOTES  | (Material)         |
| 第三角视图              | 比例: 1:1        | (SCALE)            |

|                          |               |            |     |
|--------------------------|---------------|------------|-----|
| <b>Coorle Technology</b> |               |            |     |
| 系列 (SERIES)              | 名称 (NAME)     |            |     |
| 56                       | 56 6P6C圆针全塑无灯 |            |     |
| 图号 (DWG NO.):            | 料号 (PART NO): | 版本 (REV.): | A1  |
| CL-206001                | CL-206001     |            |     |
| 单位 (UNIT):               | 共 (SHEET)     | 第 (OF)     | 1 页 |
| MM                       | 1 页           | 1 页        |     |