
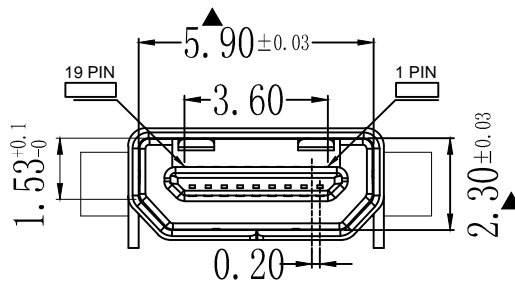
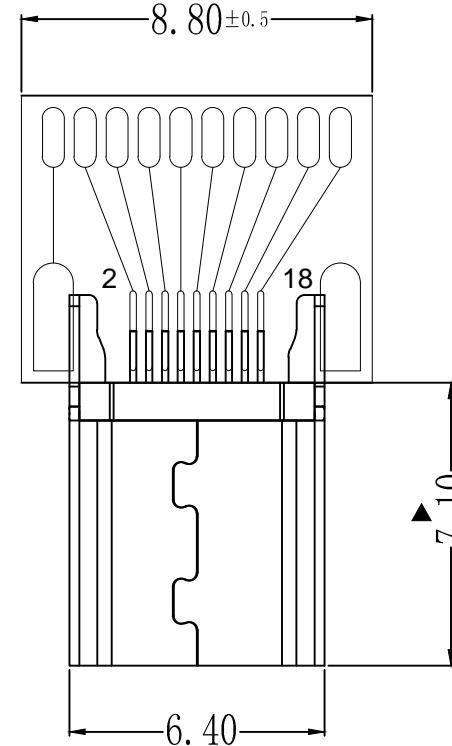
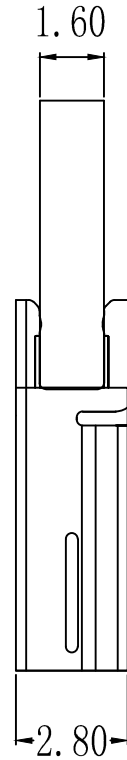


RoHS Compliant

REV.	ZONE	DESCRIPTION	DESIGN	DATE
A		初版发行	Jack	15.10.18

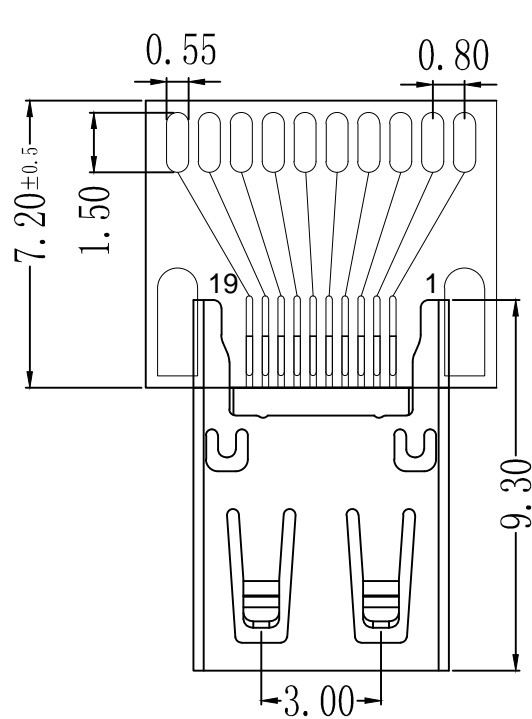

- NOTES:
1. 插入力: 44.1N MAX.
 2. 拔出力: 5N MIN(AFTER 5000 CYCLES 3N MIN); 25N MAX.
 3. 耐久性: 5000 CYCLES MIN.
 4. 额定电流: 0.3A
 5. 额定电压: 40V MAX
 6. 耐电压: 250V AC MIN. (UNMATED) 150V AC MIN. (MATED)
 7. 接触阻抗: 10mΩ MAX.
 8. 绝缘电阻: 100MΩ MIN (UNMATED) 10MΩ MIN (MATED)
 4. 工作温度: -20°C TO +85°C
 5. 外观不得有缩水、缺胶、毛边、变形等不良。
 6. 标有△为重点尺寸。
 7. 材质: 壳体: SPCC 端子: C5191 塑胶主体: LCP+30%G. F UL94V-0.
 8. 电镀: 外壳镀镍80U"-120U", 镀金G/F 端子镀全金 接触点镀金G/F.
 9. 盐雾: 24H.
 10. 所用材质须符合ROHS要求。

Unless otherwise specified tolerances are		Coorle 库乐科技						
X.X	±0.25	DRAW NO.	ZQ-15-0078	DATE	DRAW NAME:			
X.XX	±0.20		Jack			15.10.18	HDMI 19P DF 带PCB板(窄板)	
X.XXX	±0.15	DWN			P/N : HD19DFDBZFAU			
X*	±2.0*	CHK						
X.X*	±1.0*	APVD						
Third Angle Project		FINISH		UNIT	SCALE	WEIGHT	REV	SHEET
		MATERIAL		mm	1:1		A	1 OF 1