
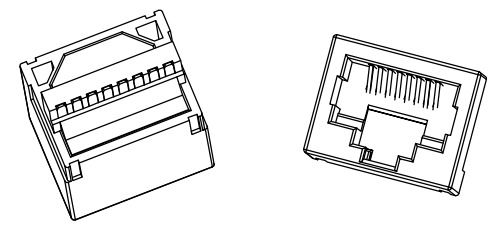
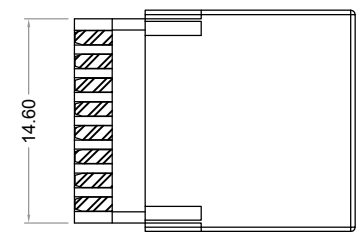

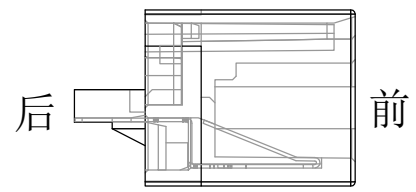



REV.	ECN.NO.	NAME	DATA
A0	NEW	MIN-D	2020-05-22

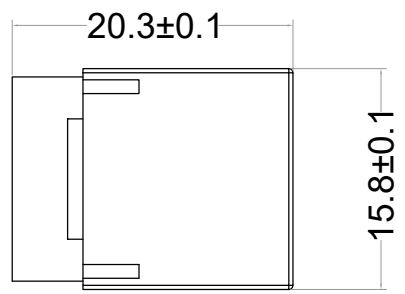

**SPECIFICATION NOTES:**

**ELECTRICAL:**

- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 30mΩ MAX.
- INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
- DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

**MECHANICAL:**

- HOUSING MATERIAL:  
SEE PART NUMBER.
- CONTACTS:∅0.46mm PHOSPHOR BRONZE,GOLD PLATING OVER NICKEL
- OPERATING LIFE:750 CYCLES MIN.
- MATING FORCE: 22N MAX.  
UNMATING FORCE: 22N MAX.
- Wave soldering Temp: 235°+/-5°

**ENVIRONMENTAL:**

- STORAGE: -40°C TO +85°C
- OPERATION: -40°C TO +85°C

DETACHED LISTS	MM (INCH)	绘图 (Designed)	MIN-D 2020-05-22
	公差 TOLERANCES	审核 (Checked)	
	MM	批准 (Approved)	
	角度 (ANGLES) ± 1.5°	材料 (Material)	SEE NOTES
	第三角视图	比例 (SCALE)	1:1

<b>Coorle Technology</b>			
系列 (SERIES)	名称 (NAME)		
RJ	RJ45 8P8C 方形母座		
图号 (DWG NO.):	版本 (REV.)	A0	
料号 (PART NO.):	单位 (UNIT):	共 (SHEET)	1 页 第 (OF) 1 页