







|              |                      |                     |                 |
|--------------|----------------------|---------------------|-----------------|
| 变更<br>CHANGE |                      |                     |                 |
| 版本<br>EDITI  | 变更内容<br>MODIFICATION | 变更日期<br>UPDATE DATE | 签名<br>SIGNATURE |
|              |                      |                     |                 |
|              |                      |                     |                 |

RoHS COMPLIANT




FEATURES:

- 1 Electrical Test:
  - A. Safety Voltage/Current Rating 150V ac, at 1.5A.
  - B. Dielectric with standing 1000V/DC/min, <0.5A.
  - C. Insulation Resistance: >500MΩ, 1000V./min
  - D. Contact Resistance: <20MΩ
- 2 Mechanical:
  - A. Cable-to-Plug tensile strength=20LBs (89N)min.
  - B. Durability:750 mating cycles.
- 3 Operation Temperature:-40℃~+85℃.
- 4.Environmental compliance
  - A. the products are compliant with the RoHS, and REACH ETC.
- 5. Safety standards:UL E239590

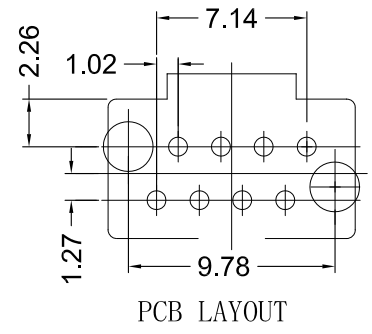

# Coorle Technology

|   |  |            |             |             |             |             |     |
|---|--|------------|-------------|-------------|-------------|-------------|-----|
| 品名规格<br>DESCRIPTION   | PCB水晶头   |            |             |             | 页次<br>SHEET | 1/1         |     |
| 产品编号<br>PRODUCT NO  |  | 单位<br>UNIT | mm          | 比例<br>SCALE | 1:1         | 版本<br>EDITI | A/0 |
| DIMENSION IN mm(Inch)<br>TOLERANCE UNLESS<br>OTHERWISE SPECIFIED<br>x. x ±0.2<br>x. xx ±0.1<br>x. xxx ±0.05 | 第三视角法<br>THIRD ANGLE PROJECTION<br> |            | 制图<br>DRAWN |             | 日期<br>DATE  | 2018.04.17  |     |
|   |  |            | 核对<br>CHECK |             | 日期<br>DATE  | 2018.04.17  |     |
|   |  |            | 批准<br>APPRO |             | 日期<br>DATE  | 2018.04.17  |     |