


MARK	ECN NO.	日期 DATE	修改 DRAW	核准 APPROVE

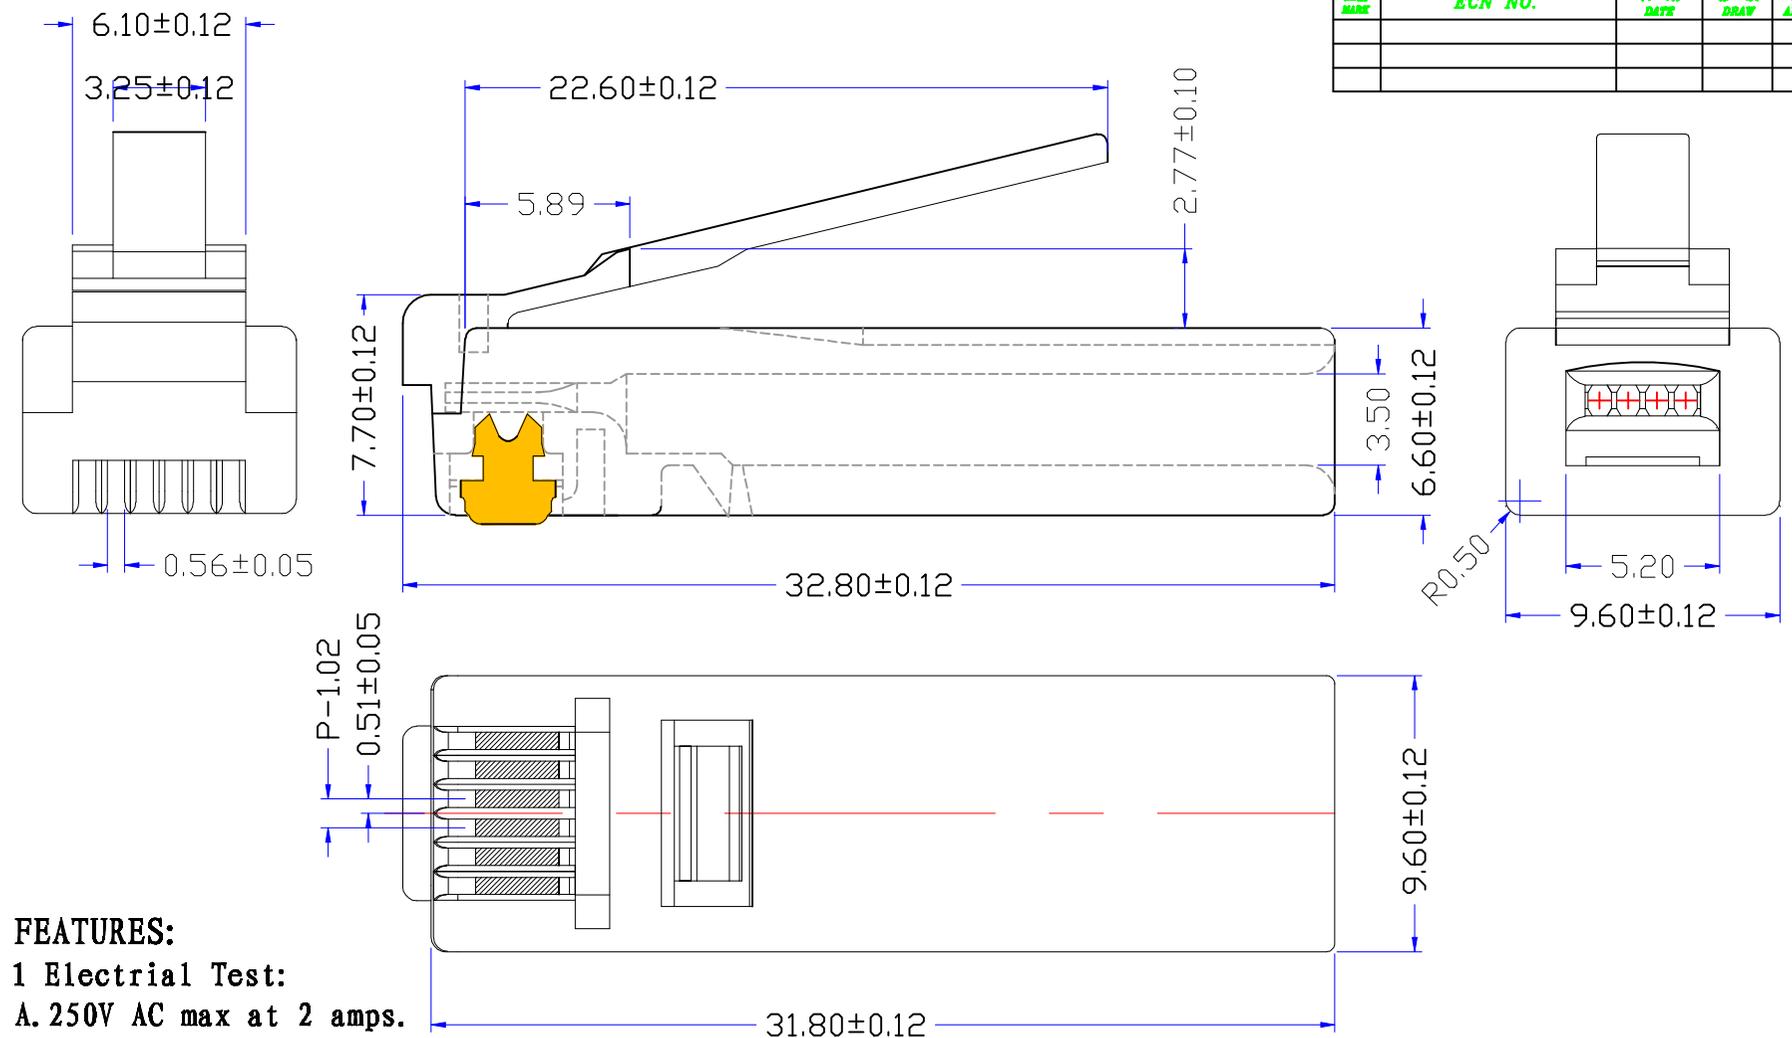

**FEATURES:**

- 1 Electrical Test:**
  - A. 250V AC max at 2 amps.
  - B. Dielectric with standing 500volts AC.
  - C. Insulation Resistance: 500 megaohms.
  - D. Termination Resistance: 35megaohms.
- 2 Mechanical:**
  - A. Cable-to-Plug tensile strength-20LBs (89N) min.
  - B. Durability: 500 mating cycles.
  - C. gold plating(口01, 口03, 口06, 口15, 口30, 口50)U"

REV. 版本	A/0	DATE 日期	2014. 12. 01	UNITS 单位	MM	TITLE 产品名称	6P6C(F) 特长
DRAWN 绘图	<i>Liuyao</i>			SCALE 比例	FULL	PART NO. 产品编号	LC-213 MP6P6C/4C/2C 特长
APPROVED 审核	<i>Yiyao</i>	MATERIAL 材质	PC (聚碳酸酯)	TOL. 公差	0.00 ±0.12	VIEW 视图	第三角法
FIRING 防火等级	94V2	东莞市库乐信息科技有限公司 TEL:0769-81585156 FAX:0769-816051565156					