
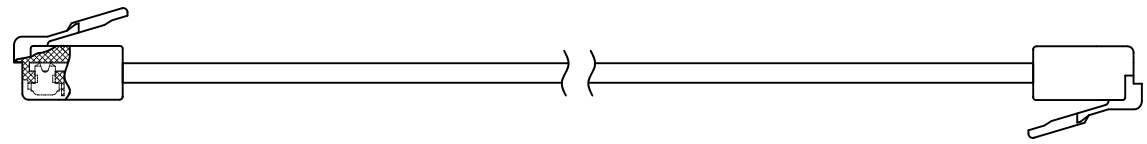


| REV. | ECN NO. | DATE |
|------|---------|------------|
| 1.00 | 第一次制定 | 2017.02.27 |

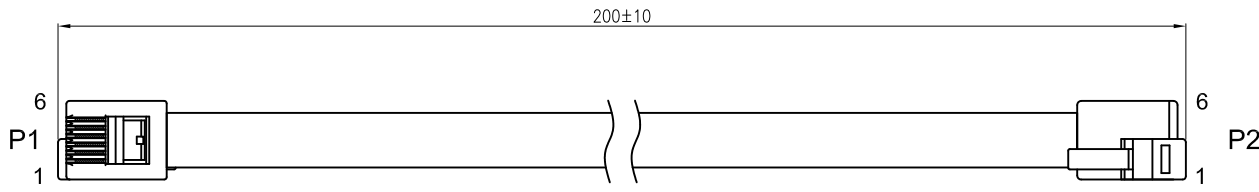

CONTACT接线

| P1 | Color颜色 | P2 |
|----|---------|----|
| 6 | Blue蓝 | 6 |
| 5 | Yellow黄 | 5 |
| 4 | Green绿 | 4 |
| 3 | Red红 | 3 |
| 2 | Black黑 | 2 |
| 1 | White白 | 1 |

- NOTES
- 1 Open, Short, Miswire 100% test;
 - 2 Insulation resistance: 20M Ω min/DC 500V;
 - 3 Contact resistance: 5 Ω max;
 - 4.Cable TL Plug Tensile Strength:7.7Kg Min;
 - 5.Operation temperature: -10 $^{\circ}$ C~+60 $^{\circ}$ C ;
 - 6.Storage temperature: -10 $^{\circ}$ C~+40 $^{\circ}$ C relative humidity <80%.



- 注释
- 1.100%开路、短路、错位测试;
 - 2.绝缘阻抗:最小20兆欧姆/DC500V;
 - 3.导通阻抗:最大5欧姆;
 - 4.插头与线缆之间的拉力: 最小7.7Kg;
 - 5.工作温度: -10 $^{\circ}$ C~+60 $^{\circ}$ C ;
 - 6.储存温度: -10 $^{\circ}$ C~+40 $^{\circ}$ C 相对湿度<80%。

RoHS Compliant

| 2 | | 水晶头右扣位6P6C G/F 方孔 | PC料透明(环保料) |
|-----|---------|----------------------------------|---|
| 1 | | CABLE UL 20251 28AWG(7/0.12B)*6C | OD:2.4*6.7 PVC, color silver gray L=200mm |
| NO. | DWG NO. | NAME | DESCRIPITON |

| | | | | | | | | | | | |
|------------------------|--|-----|-------|------------|-----------|----------------|--|-----------|--|---------------------------------------|--|
| | | | | TOLERANCES | | MATERIAL: 见明细表 | | Designed: | | NAME: CABLE 28AWG(7/0.12B)*6C L=200MM | |
| | | | | 0~30 ±0.15 | | FINISH: 见明细表 | | Checked: | | DWG NO: CL20171222001 | |
| FIRST ANGLE PROJECTION | | A4 | SCALE | UNIT | CUSTOMER: | SHEET 1 OF 1 | | Approved: | | PART NO: CB202510011 | |
| SIZE | | 1:1 | mm | MODEL NO: | | | | | | | |

| REV. | ECN NO. | DATE |
|------|---------|------------|
| 1.00 | 第一次制定 | 2017.02.27 |

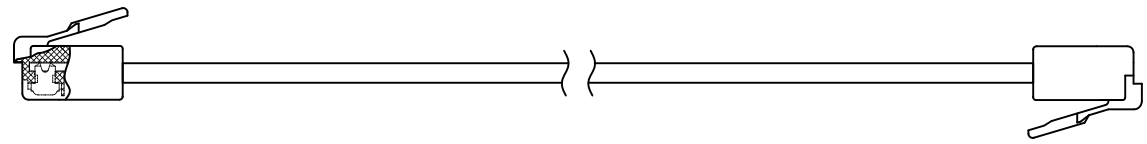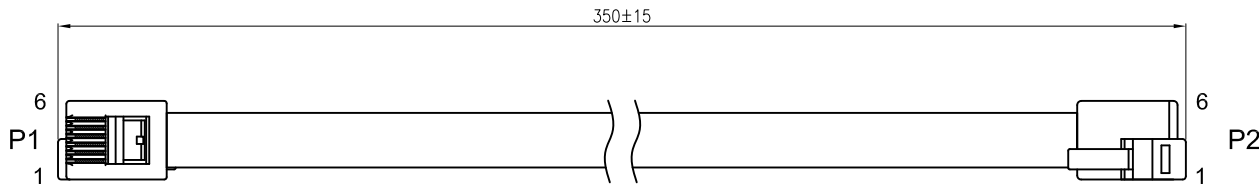

CONTACT接线

| P1 | Color颜色 | P2 |
|----|---------|----|
| 6 | Blue蓝 | 6 |
| 5 | Yellow黄 | 5 |
| 4 | Green绿 | 4 |
| 3 | Red红 | 3 |
| 2 | Black黑 | 2 |
| 1 | White白 | 1 |

- NOTES
- 1 Open, Short, Miswire 100% test;
 - 2 Insulation resistance: 20M Ω min/DC 500V;
 - 3 Contact resistance: 5 Ω max;
 - 4.Cable TL Plug Tensile Strength:7.7Kg Min;
 - 5.Operation temperature: -10 $^{\circ}$ C~+60 $^{\circ}$ C ;
 - 6.Storage temperature: -10 $^{\circ}$ C~+40 $^{\circ}$ C relative humidity <80%.

- 注释
- 1.100%开路、短路、错位测试;
 - 2.绝缘阻抗:最小20兆欧姆/DC500V;
 - 3.导通阻抗:最大5欧姆;
 - 4.插头与线缆之间的拉力: 最小7.7Kg;
 - 5.工作温度: -10 $^{\circ}$ C~+60 $^{\circ}$ C ;
 - 6.储存温度: -10 $^{\circ}$ C~+40 $^{\circ}$ C 相对湿度<80%。

RoHS Compliant

| 2 | | 水晶头右扣位6P6C G/F 方孔 | PC料透明(环保料) |
|-----|---------|----------------------------------|---|
| 1 | | CABLE UL 20251 28AWG(7/0.12B)*6C | OD:2.4*6.7 PVC, color silver gray L=350mm |
| NO. | DWG NO. | NAME | DESCRIPITON |

| | | | | | | | | | | | |
|------------------------|--|-----|-------|------------|-----------|----------------|--|-----------|--|---------------------------------------|--|
| | | | | TOLERANCES | | MATERIAL: 见明细表 | | Designed: | | NAME: CABLE 28AWG(7/0.12B)*6C L=350MM | |
| | | | | 0~30 ±0.15 | | FINISH: 见明细表 | | Checked: | | DWG NO: | |
| FIRST ANGLE PROJECTION | | A4 | SCALE | UNIT | CUSTOMER: | SHEET 1 OF 1 | | Approved: | | PART NO: CB202510012 | |
| SIZE | | 1:1 | mm | MODEL NO: | | | | | | | |