

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
AO	INITIAL RELEASE	KEN	19.09.08






NOTES:

MATERIAL:



1. Housing: Polycarbonate(PC).
2. Terminal: Brass, gold plating over nickel.

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 1000 CYCLES

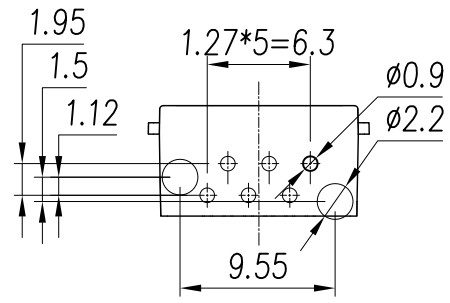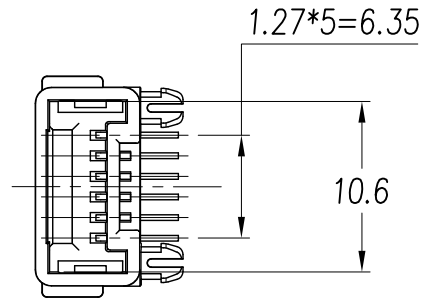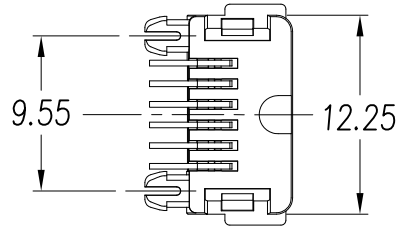

PCB LAYOUT



UNLESS OTHERWISE SPECIFIED TOLERANCES		Coorle 库乐科技	
DECIMALS:	ANGLES:	TITLE	Wedo 2.0 Plug 6P6C
X :±0.20	X :±3°	DWN	Michael 19.09.08
X.X :±0.10	X.X :±1°	CHKD	
X.XX :±0.05		APVD	
		PART-NO:	
		UNIT: mm	
		SHEET:1 OF 1	
		SCALE:1/1	
ENGINEERING COPY			