
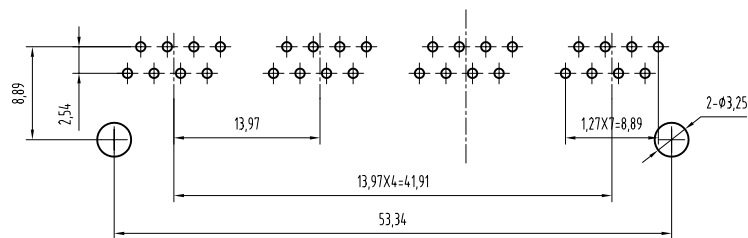
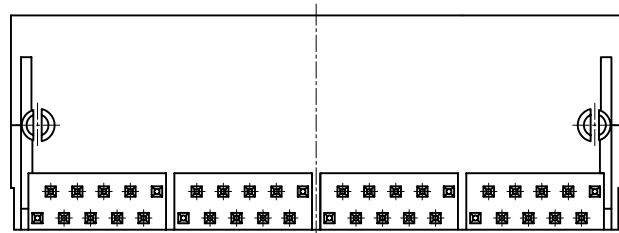



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

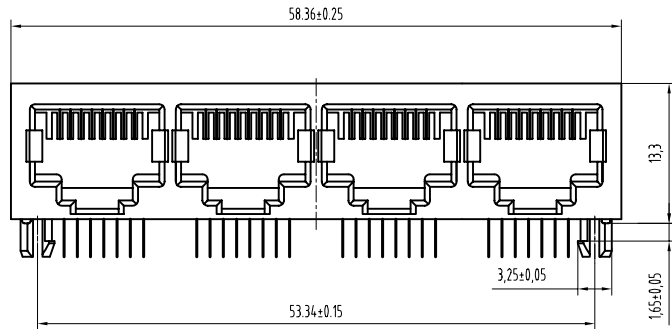

PC Board Layout  
Component Side Shown

NOTES:

MATERIAL :

- |                     |                                   |
|---------------------|-----------------------------------|
| 1. HOUSING MATERIAL | : GLASS FILLED POLYESTER UL94V-0. |
| 2. CONTACT MATERIAL | : PHOSPHOR BRONZE Ø0.46mm.        |
| 3. PLATING          | : GOLD PLATING OVER NICKEL.       |

ELECTRICAL:


- |                                       |                               |
|---------------------------------------|-------------------------------|
| 1. VOLTAGE RATING                     | : 125 VAC RMS.                |
| 2. CURRENT RATING                     | : 1.5 AMP.                    |
| 3. CONTACT RESISTANCE                 | : 30 MILLIOHMS MAX.           |
| 4. INSULATION RESISTANCE              | : 500 MEGOHMS MIN @ 500V DC . |
| 5. DIELECTRIC WITHSTANDING RESISTANCE | : 1000V AC RMS 50Hz. 1MIN.    |

MECHANICAL:

- |                             |                   |
|-----------------------------|-------------------|
| 1. DURRABILITY              | : 750 CYCLES MIN. |
| 2. PCB RETENTION PRE-SOLDER | : 1 LB MIN.       |

ENVIRONMENTAL:

- |              |                |
|--------------|----------------|
| 1. STORAGE   | : -40°C~+85°C  |
| 2. OPERATION | : 0°C TO 70°C. |

DETAILED LISTS	MM (INCH)	DFTD: SHB	DATE: 2007.05.03	
	TOLERANCES EXCEPT AS NOTED	CHKD: LANBO	DATE: 2007.05.03	
	MM	MFG:	DATE:	
	.0 ± 0.15 ±	APPLV:	DATE:	
.00 ± 0.075 ±	MATERIAL :	TITLE		
.000 ± 0.05 ±	ANGLES ± 0.5	QTY :	59A 1x4 JACK W/O SHIELD YELLOW	
THIRD ANGLE PROJECTION	FINISH :	SCALE :	DRAWING NO. TES9A1008	
			/PART NO.	
			DO NOT SCALE DRAWING	
			SHEET X OF Y	